



## UPS POWER BANK (UPK-08P) SPECIFICATION





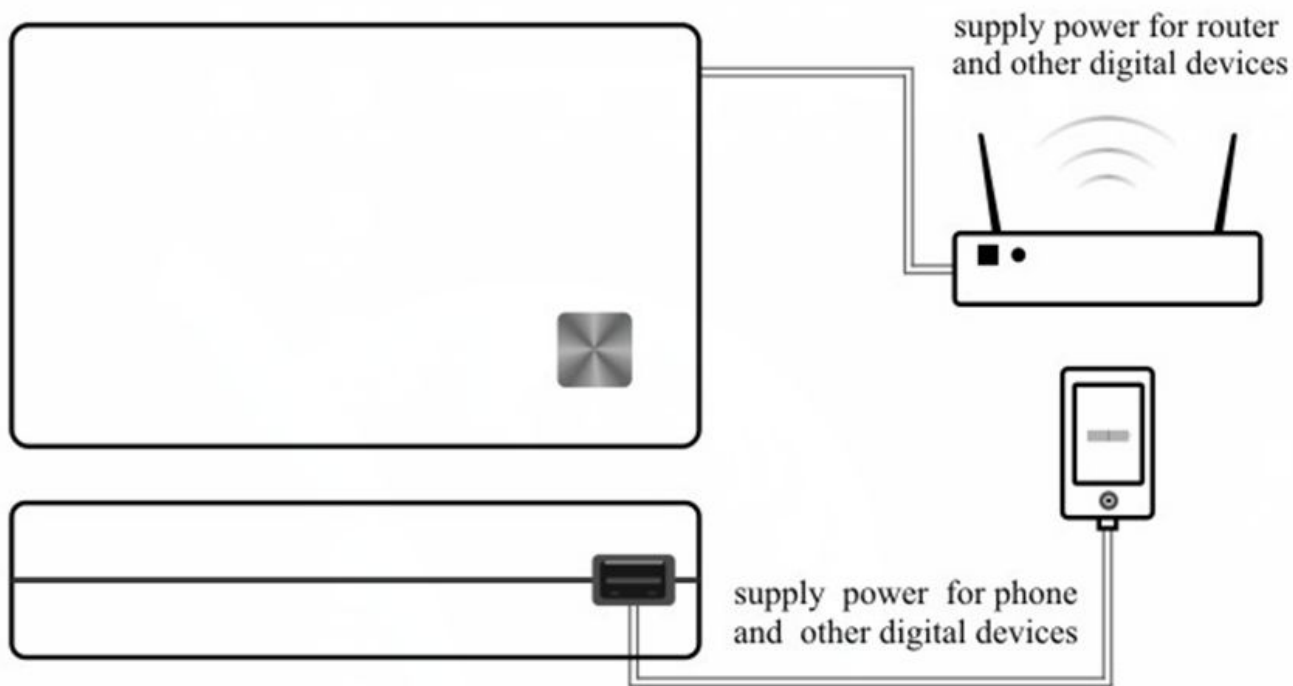

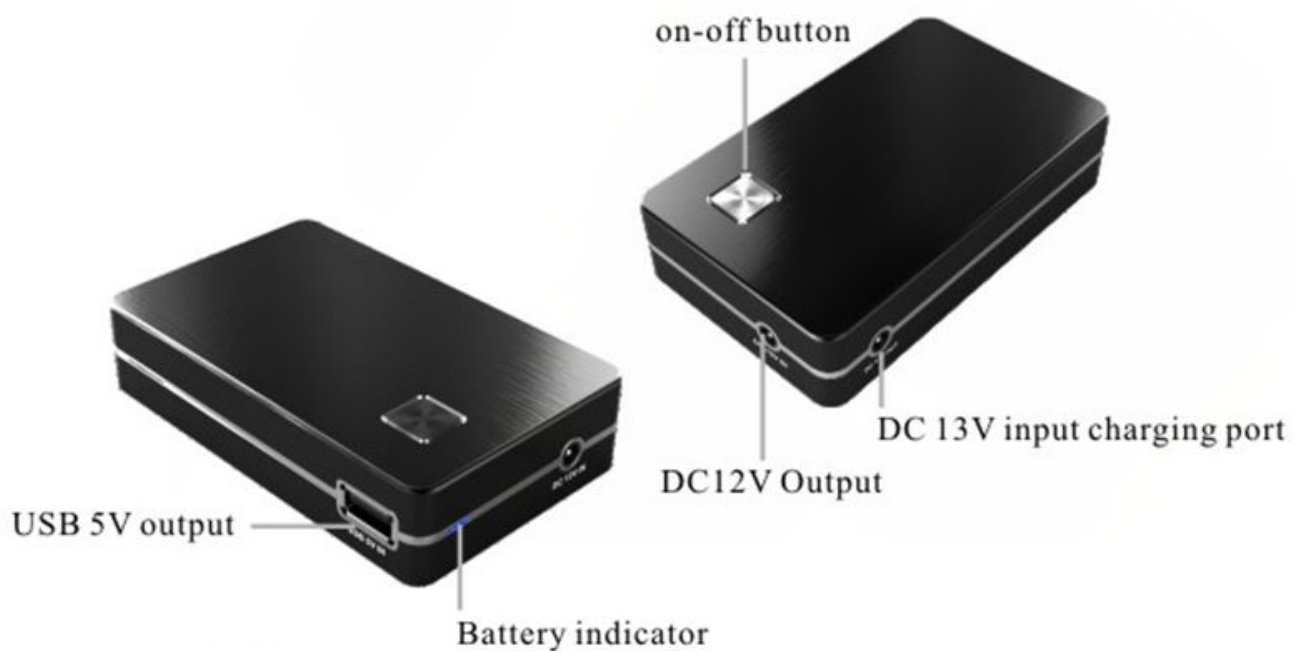

1 IN 4 CABLE



1 IN 8 CABLE



### Parameter

- 1 Built-in rechargeable lithium-ion battery 6600/8000mah;
- 2 Charging input voltage: DC13V-DC14V;
- 3 Input Current: 1A-5A;
- 4 Input voltage: output DC 12V and DC5V at the same time;
- 5 output current; {a} general temperature range: -10 °C -50 °C {b} 5V output port: 1A (max);
- 6 Weight: about 200g;
- 7 Dimensions: 98mm \* 60mm \* 22mm;
- 8 battery life; charging times more than 500 times;
- 9 maximum continuous output power: 50W (MAX);
- 10 Charging time: About 2 to 3 hours;
- 11 temperature and humidity conditions; {A} general temperature range is -10 °C -50 °C {b} humidity: ≤ 85%  
{c} air pressure: 85kpa;
- 12 Transport and storage conditions: humidity range is {A} -10 °C -50 °C {b} humidity: ≤ 85%
- 13 Protection: {A} overcharge protection; Yes {b} Overload: Yes {C} short circuit and over-current protection; Yes

### Suitable device:

MOBILE, PSS, IPOD, IPHONE, MP4, PMP, GPS, CAMERA, MINI PROJECTOR, SWITCH, POS, ROUTER, 5v, 12v devices, etc

### Features:

- 1 large output power: 50W;
2. high-capacity lithium battery;
- 3 hidden Indicator, work indicate, charging indicate, battery indicate;

4. Provide uninterrupted power supply
5. charging for multiple devices at the same time
- 6 high reliability;
- 7 Smart Control;
- 8 high grade design, exquisite production craft

### **How to check the dump capacity**

you can check the remaining dump energy on the follow:

- 1 press the power button, power indicator will lights automatically and turn off after 3 seconds, when it is light up you can see the dump capacity.
- 2 double-press the power button, battery indicator will light ,then you can see the dump capacity, double-press again, lights off.

### **How to Charge**

Charging port located on the left side of product, before using this product, please make necessary charge, Only the battery has enough power can be turned on and the supply external power, you can choose 13V-14V power supply or use our Special power supplies for charging, Indicator will lights up and displays the status of charge and current battery power. When charging is completed, the four indicator will all lights up and indicate it is fully charged.

### **How to supply the power for your device**

- 1 double-press the power button to switch the on-off operation, when turned on, power indicator will light up and display The current power status.
2. USB 5V voltage output port output stable 5V standard voltage, For mobile phones, tablet pc and other 5V digital products.
3. 12V output port can be output DC9-DC14V voltage, For camera, video recorder, LED lights, and other 12V electronic products.

### **Caution**

Read the instructions carefully before use, incorrect use may cause damage, overheating smoke, fire and other unusual phenomena caused danger, Any liability arising therefrom will not be assumed by our company.

- 1 Do not put the item in a hot environment, on fire or extreme high temperature environments (such as the car under

the hot sun, etc.)

2 Do not intense wrestling, throw, hit, friction the product etc., as this may cause the product to hollow, perforation, cracking, deformity, corrosion and other unusual phenomena, If unusual phenomena occur, discontinue use immediately and contact your dealer or manufacturer .

3 Do not disassemble or repair the product.

4 Do not expose in wet conditions or immerse in liquids , keep the item in a dry environment.

5 if use other methods to charge except use our Special charger for charging our item, please read the instruction manual carefully.